

TVT

Secure The World With You



TD-7422AE2

2 MP HD IR Water-proof Bullet Camera

TVT

TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 23rd Floor, Block B4, Building NO.9, Shenzhen Bay
Eco-Technology Park, Nanshan District, Shenzhen, Guangdong
Province, P.R.China


Tel: +86-755-36995888

Fax: +86-755-33104777

Web site: <http://en.tvt.net.cn>

E-mail: overseas@tvt.net.cn


2 MP HD IR Water-proof Bullet Camera



Features

- 1080P real time image, high resolution, true color
- AHD/TVI/CVI/CVBS lossless video output
- Up to 1000 TVL resolution
- CMOS progressive scan, perfectly capture the moving object
- Support OSD menu
- High speed, long distance, real time transmission
- Auto color to B / W at low illumination
- Support ICR switch, true day / night
- Support noise reduction function
- 20 ~ 30m IR night view distance
- IP66 ingress protection
- Support COC
- Support 960H CVBS output


Dimensions

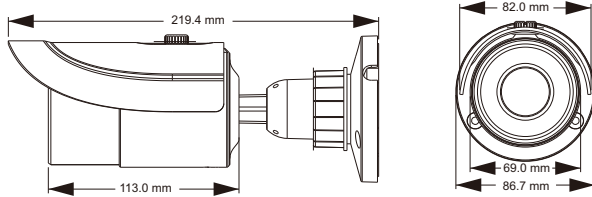

Available Accessories



TD-YXH0301 TD-YXH0103 TD-YXH0301+TD-YZJ0810



TD-YXH0301+TD-YZJ0501 TD-YXH0301+TD-YZJ0601

Specifications

Model	TD-7422AE2
Specifications	
Camera	
Image Sensor	1 / 2.9 "CMOS
Resolution	2MP
Image Size	1920 x 1080
Video Output	AHD / TVI / CVI / CVBS
Image System	PAL / NTSC
Electronic Shutter	Auto; 1 / 50s ~ 1 / 100000s (PAL); 1 / 60s ~ 1 / 100000s (NTSC)
IR Distance	20 ~ 30 m
Frame Rate	30fps (60Hz), 25fps (50Hz)
Min. Illumination	0 Lux (IR ON)
Lens	3.6 mm (2.8 mm, 6 mm and 2.8 ~ 12 mm optional)
Lens Mount	M12 and D14 optional
S / N Ratio	≥52dB (AGC OFF)
Ingress Protection	IP66
Functions	
Function Control	OSD (COC Control)
Day & Night	ICR
Digital WDR	Yes
Digital NR	Yes
Global Exposure	Yes
Central Exposure	Yes
AGC	Yes
Auto White Balance	Yes
BLC	Yes
Front Light Compensation	Yes
Sharpness	Yes
Smart IR	Yes
Image Setting	Yes
Defect Correction	Auto
Language	Chinese / English
Angle Adjustment	Any angle
Others	
Power Supply	DC12V (± 10%)
Power Consumption	Day : < 1W; Night : < 4W
Working Environment	- 20 °C ~ 50 °C, 10 % ~ 90 % (relative humidity)
Dimensions (mm)	Φ87 x 219

Available Model

Available Model	TD-7422AE2 (D / IR2)
	TD-7422AE2 (D / FZ / IR2)