

TVT

Secure The World With You

www.tvt.net.cn



TD-9422S1H

**2 MP Network IR Water-proof
Bullet Camera**

TVT

TVT DIGITAL TECHNOLOGY CO., LTD.

Address: 5F, North Block, CE Lighting House, Hi-Tech Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China 518057


Tel: +86-755-3330 6001

Fax: +86-755-3330 6002

Web site: www.tvt.net.cn

E-mail: overseas@tvt.net.cn


2 MP Network IR Water-proof Bullet Camera

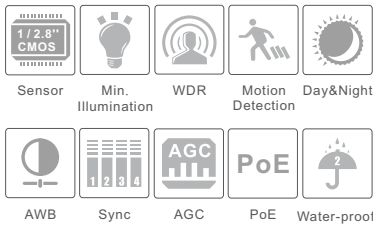

Features

- 2MP (1920 x 1080) coding
- Max- resolution:1920 x 1080
- ICR auto switch, true day / night
- 20 ~ 30m IR night view distance
- 3D DNR, digital WDR
- ROI coding
- PoE power supply
- Support smart phone, iPad, remote monitoring
- Support P2P
- IP66 ingress protection
- Support three streams

Dimensions

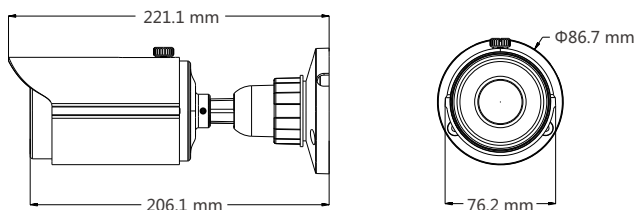

Available Accessories



TD-YXH0201

Specifications

| Model | TD-9422S1H |
|----------------------------|--|
| Specifications | |
| Camera | |
| Image Sensor | 1 / 2.8 "CMOS |
| Image Size | 1920 x 1080 |
| Electronic Shutter | 1 / 25 s ~ 1 / 100000 s |
| Iris Type | Fixed Iris |
| Min. Illumination | Color : 0.002 lux @F1.2,AGC ON; B / W : 0.0002 lux @F1.2,AGC ON |
| Lens | 2.8 mm @ F1.6, horizontal field of view : 107° 3.6 mm @ F1.6, horizontal field of view : 85.8° 6 mm @ F1.6, horizontal field of view : 52.6° 2.8~12 mm @ F1.4-2.8, horizontal field of view : 95.7° ~ 35.9° |
| Lens Mount | M12 and Φ14 optional |
| Day & Night | ICR |
| Wide Dynamic Range | Digital WDR |
| Digital NR | 3D DNR |
| Angle Adjustment | Any angle |
| Image | |
| Video Compression | H.264 / MJPEG |
| H.264 Compression Standard | Baseline Profile / Main Profile / High Profile |
| Resolution | 1080P (1920 x 1080), 720P (1280 x 720), D1, CIF, 480 x 240 |
| Main Stream | 60Hz : 1080P (1 ~ 30fps) / 720P (1 ~ 30fps) 50Hz : 1080P (1 ~ 25fps) / 720P (1 ~ 25fps) |
| Bit Rate | 128Kbps ~ 6Mbps |
| Bit Rate Type | VBR / CBR |
| Quality | Five levels under VBR; Freely adjustable under CBR |
| Image Settings | ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser |
| ROI | Each ROI to be configured separately |
| Interfaces | |
| Network | RJ45 |
| Functions | |
| Remote Monitoring | IE browsing, CMS remote control |
| Online Connection | Support simultaneous monitoring for up to 3 users ; Support multi-stream real time transmission |
| Network Protocol | TCP/IP, UDP, DHCP, NTP, RTSP, DDNS, SMTP, FTP |
| Interface Protocol | ONVIF |
| Storage | Network remote storage |
| Smart Alarm | Motion alarm |
| PoE | Yes |
| IR Distance | 20 ~ 30 m |
| Ingress Protection | IP66 |
| Others | |
| Power Supply | DC 12V / PoE |
| Power Consumption | < 3W |
| IR Consumption ON | < 6W |
| Operating Environment | - 20°C ~ 50°C, 10% ~ 90% relative humidity |
| Dimensions (mm) | Φ87 × 221 |
| Weight (net) | 624g |
| Installation | Wall mounting, pendent mounting |

Available Model

| | |
|-----------------|----------------------------------|
| Available Model | TD-9422S1H (D / PE / IR2) |
| | TD-9422S1H (D / FZ / PE / IR2) |