



# LigoDLB 5-90n

5GHz Base Station with Integrated Antenna

## DLB 5-90n

LigoWave's DLB 5-90n delivers the highest performance and stability available in the 5GHz Base Station class. This product combines a highly advanced radio core containing MIMO 2x2 technology with an integrated, high-gain, dual polarization directional antenna. The feature-rich operating system is optimized for ultra-high performance wireless communications.

The smart dynamic polling based protocol (iPoll 3) ensures reliable communication even in congested areas with 64 client devices connected to a base-station.

Equipped with LigoWave's dual firmware image feature, remote software upgrades are assured even if a power failure interrupts the process. The device will restart using the prior firmware in the event of an upgrade failure.

The enclosure is made of polycarbonate plastic with UV inhibitors to provide years of outdoor exposure in direct sunlight without cracking. The DLB 5-90n was designed and tested to meet an IP-66 rating as well as vibration, temperature, drop, salt, fog, and electrical surge standards to ensure a high level of reliability unsurpassed in the industry.



### New form factor

The shape of the enclosure is now smaller, lighter and retains the IP-66 weather protection rating. Smaller packaging reduces freight costs and makes them less obvious. The new LigoDLB 5-90n design has no metal parts, which makes them lighter and corrosion resistant.




### New mounting

The adjustable mounting bracket is very easy to assemble and install. It consists of two easy to connect parts that allow tilting the device up and down when installing on a pole. A metal strap is included to securely tighten the device. This design includes additional reinforcements and thicker materials to ensure survival in extreme climate conditions.

## OS

The DLB OS is a highly functional and easy to use operating system. This powerful and flexible operating system ensures flawless operation of all DLB hardware devices and effortless setup for those deploying the networks.

- Smart polling data transmission protocol (iPoll 3)
- Dual-firmware image support
- Responsive HTML 5 based GUI
- 170Mbps capacity
- 80,000 PPS rate
- IPv6 support
- WNMS compatible

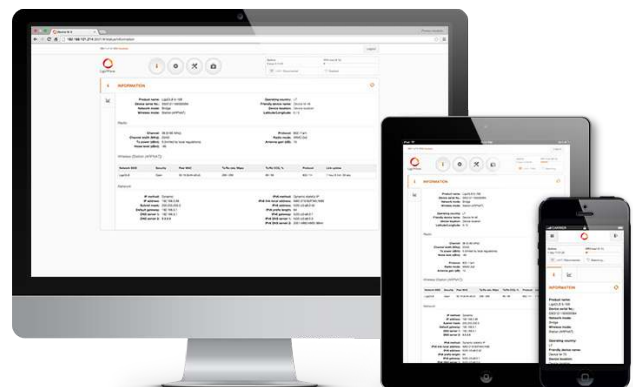

# Specifications

Product/ distance recommendation	PTMP mode	PTP mode	PTP mode (full capacity)
DLB 5-90n	7km/ 4.35mi	N/A	N/A

## Wireless

WLAN standard	IEEE 802.11a/n, iPoll
Radio mode	MIMO 2x2
Radio frequency band	5,150 - 5,850GHz (FCC 5,150 - 5,250 and 5,725 - 5,850GHz)
Transmit power	Up to 29dBm (country dependent)
Receive sensitivity	Varying between -97 and -75dBm depending on modulation
Channel size	5,10, 20, 40MHz
Modulation schemes	802.11a/n: OFDM (64-QAM, 16-QAM, QPSK, BPSK)
Data rates	802.11n: 300, 270, 240, 180, 120, 90, 60, 30Mbps 802.11a: 54, 48, 36, 24, 18, 12, 9, 6Mbps
Error correction	FEC, Selective ARQ
Duplexing scheme	Time division duplex

Receive sensitivity (dBm)	802.11 N/ iPoll (20/ 40MHz)	15Mbps	30Mbps	45Mbps	60Mbps	90Mbps	120Mbps	135Mbps	150Mbps
		-97	-95	-93	-88	-85	-81	-79	-77
802.11 a	30Mbps	60Mbps	90Mbps	120Mbps	180Mbps	240Mbps	270Mbps	300Mbps	
	-94	-92	-89	-85	-82	-78	-77	-75	
802.11 a	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	
	-97	-97	-95	-93	-90	-86	-82	-81	

Output power (dBm - combined)	802.11 N/ iPoll (20/ 40MHz)	15Mbps	30Mbps	45Mbps	60Mbps	90Mbps	120Mbps	135Mbps	150Mbps
		29	28	28	28	27	27	25	24
802.11 a	30Mbps	60Mbps	90Mbps	120Mbps	180Mbps	240Mbps	270Mbps	300Mbps	
	28	28	28	28	26	26	24	23	
802.11 a	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	
	29	29	29	29	29	27	26	25	

## Antenna

Type	Integrated dual-polarized 90 degree sector antenna
Gain	18dBi

## Wired

Interface	10/100 Base-T, RJ45
-----------	---------------------

## Software

Wireless operating modes	Access point (auto WDS), access point (iPoll 2), access point (iPoll 3), station (WDS iPoll 2, iPoll 3), station (ARP NAT)
Wireless techniques	Smart station polling, smart auto-channel, adaptive auto modulation, automatic transmit power control (ATPC)
Wireless security	WPA/WPA2 personal, WPA/WPA2 enterprise, WACL, user isolation
Wireless QoS	4 queues prioritization on iPoll 3
Network operating modes	Bridge, router IPv4, router IPv6
Network techniques	Routing with and without NAT, VLAN
WAN protocols	Static IP, DHCP client, PPPoE client
Services	DHCP server, SNMP server, NTP client, router advertisement daemon, ping watchdog
Management	HTTP(S) GUI, SSH, SNMP read, WNMS, Telnet
Tools	Site survey, link test, antenna alignment

## Physical

Dimensions	Length 380mm, width 100mm, height 35mm
Weight	0.460g
Mounting	Pole mounting

## Power

Power supply	12 – 24VDC passive PoE (24V passive PoE adapter is included in the package)
Power source	100 – 240VAC
Power consumption (max)	4.5W

## Environmental

Operating temperature	–40°C (–40°F) ~ +65°C (+149°F)
Humidity	0 ~ 90 % (non-condensing)


## Management

System monitoring	SNMP v1 server, Syslog, system alerts via SNMP trap
-------------------	---

## Regulatory

Certification	FCC/IC/CE
---------------	-----------

## Antenna specifications

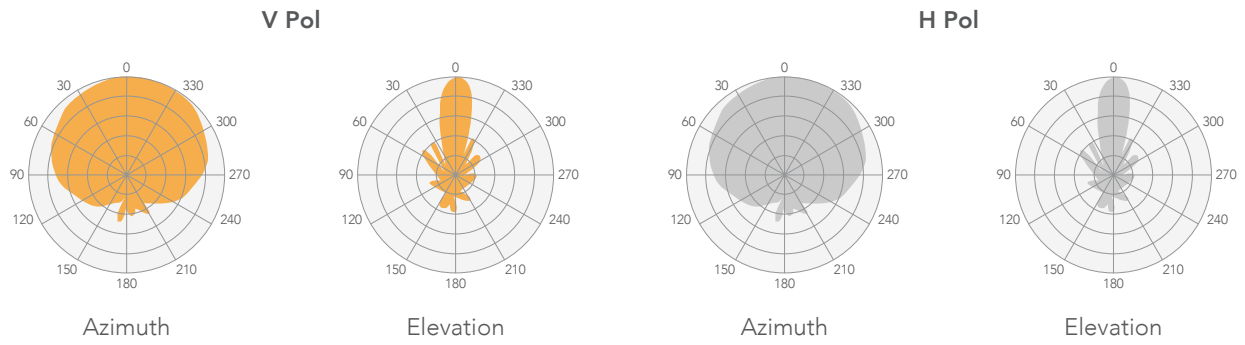

## Internal Antenna

Frequency range	5.1 - 5.9GHz
Gain	18dBi
Polarization	Dual linear
Cross-pol Isolation	24dBi
VSWR	<1.7
Azimuth beamwidth (H pol)	90deg
Azimuth beamwidth (V pol)	90deg
Elevation beamwidth	20deg