

BS-854N12/13K | E series

4MP IR Bullet Network Camera



- 1/3" 4MP Image Sensor
- H.265+ Dual-stream Encoding
- IR Effective Range 10~20m
- High Quality Optical Lens 3.6mm/6mm optional
- IVA (Smart Function) Supported
- Multiple Web Browser Supported, IE/Safari/Chrome/Firefox
- P2P Cloud Function By Mobile App (AntarView Pro)
- Lightning Protection Up to 6KV
- IP67 Ingress Protection
- Built-in PoE



System Overview

E series 4MP IP cameras are cost-efficient solution which powered by smart H.265+ and advanced cutting-edge image sensor for video monitoring.

It delivers crystal clear images and supports industry-leading IVA smart event alarm

Cloud function is built-in for every device, which is more convenient and flexible for real-time and remote viewing.

Functions

H.265+

Delivering high quality video with up to 70% lower bandwidth. H.265+ is the evolutionary optimization of H.265 and traditional H.264.

The Smart H.265+ includes a series of encoding strategy such as Dynamic ROI and smart 2D&3D noise reduction.

IVA (Intelligent Video Analysis)

It allows detection on multiple object behaviors, such as Face Detection, Tripwire, Intrusion, Object Detection and Target Counting etc.

Protection

With precise mechanical and rugged casing design, it stands against water and dust with industrial IP67 rank.

Supports $\pm 30\%$ input voltage tolerance, it could work safely in extreme unstable power condition.

With working temperature range -30°C to $+60^{\circ}\text{C}$, it works well in a variety of harsh outdoor environments.

Technical Parameters

Camera

Models	BS-854N12K	BS-854N13K	Flash/DDR	16MB/256MB
Image Sensor	1/3" 4MP Image Sensor		S/N Ratio	More than 52dB
Min. Illumination	0.08Lux/F2.0 (color) 0 Lux with IR on		IR Distance	10~20m
Effective Pixel	2592H)* 1520(V)		IR LED No.	1

Lens

Focal Length	3.6mm	6mm	FOV	89°	56°
Aperture	F2.0				

Video

Compressions	H.265 / H.264	WDR	120dB
Resolutions	4MP(2592*1520 / 2560*1440 / 2048*1520)/1080(1920*1080)1.3MP (1280*960)/720P(1280*720)D1(720*576)/VGA(620*480)/CIF(352*288)	Day/Night	Auto(ICR)/Color/B/W
Bit Rate Control	CBR/VBR	White Balance	Supported
Bit Rates	116Kbps-32Mbps	Defog	Supported
Streaming	Dual stream	Noise Reduction	3D DNR
Frame Rates	Main stream: 2592*1520(1~25/30fps) Sub stream: 720*576(1~25/30fps)	Mirror	Supported
Digital Zoom	12x	Flip	Supported
Audio Compression	G.711u	BLC	Supported
		ROI	Support 4 fixed region for main stream and sub stream separately
		Anti-flicker	Supported
		Privacy Mask	4 Areas

Alarm & Audio

Video Detections	Motion Detection, Video Shelter	IVA	Face Detection/Tripwire/Intrusion/Object Left/Missing/Target Counting
Audio	N/A		

Network

Ethernet	1 RJ-45 port(10/100Mbps)	Web Browsers	IE/Firefox/Chrome/Safari
Protocols	TCP/IP, UDP, HTTP, IGMP, ICMP, DHCP, RTP/RTSP/DNS, DDNS, FTP, NTP, PPPoE, UPNP, SMTP, SNMP	VMS	AntarVis 2.0
Onvif	Onvif Profile S	Mobile App	AntarView Pro
Max. Online User	4	Platforms	Mac OS/ Windows/iOS/Android


General

Working Temperature	-30°C~+60°C	Ingress Protection	IP67
Working Humidity	10~90%	Dimensions	160.3 (L)*63.4 (W)*64.5 (H)mm
Power Supplies	PoE, IEEE802.3af DC12V±10%	Net Weight	0.3KG
Power Consumption	<3W	Gross Weight	0.45KG

Ordering Information

Type	Part Number	Description
4MP Camera	BS-854N12K	4MP Network Camera(3.6mm Lens)
	BS-854N13K	4MP Network Camera(6mm Lens)

Dimensions (mm)

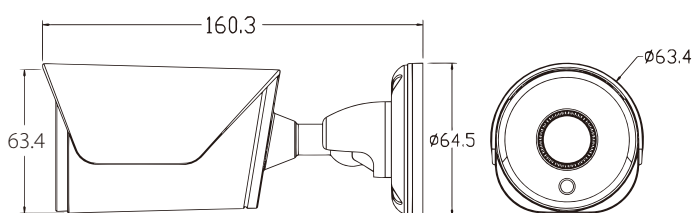

More details

ZKTECO CO.,LTD.
www.zkteco.com
E-mail: sales@zkteco.com

Copyright ©2018 ZKTECO CO., LTD. All rights reserved.

